

Inlet Pressure Regulators

Data Sheet

Type: PA4C, PA4CZ, PA4CB, PA4CS,
PA4CBS, PA4CD



Purpose:

The PA4C weld-in line series inlet pressure regulators are designed to overcome corrosion problems encountered in harsh environments. Being weld-in, the valves reduce potential for connection leaks and can be entirely serviced from the top.

This improved design has a higher working pressure, greater working temperature range and higher flow capacities than competitive products.

These valves provide long-term performance and with replaceable internal components. Specially designed wear rings eliminate the need for removal of the body from the line (maintenance-free).



Contact Information:

Parker Hannifin Corporation
Refrigerating Specialties Division
2445 South 25th. Avenue
Broadview, IL 60155-3891

phone (708) 681-6300
fax (708) 681-6306

www.parker.com/refspec

Product Features:

- Stainless steel construction increases product life cycle
- Cartridge based design simplifies service and eliminates body wear
- Increased flow capacity enables smaller valve sizing
- Overall weight reduction up to 50% compared to traditional flanged products
- Integral features prevent contaminants from reaching the pilot section of the valve
- Suitable for ammonia, CO₂ and halocarbon refrigerants
- Multiple refrigerant capacities and configurations available
- Interchangeable with other P-Series offerings
- Coil options to meet various applications



ENGINEERING YOUR SUCCESS.

Technical Data

- Liquid Temperature Range:
-60°C to 120°C (-76°F to 248°F)
- Ambient Temperature Range:
-60°C to 71°C (-71°F to 160°F)
- Max Rated Pressure (MRP):
52 barg (754 psig)
- Minimum Pressure Drop:
0.14 barg (2 psig)
- Port sizes:

mm	inch
25 ⁽¹⁾	1"

- Flow Coefficients:

Port Size		K _v	C _v
mm	inch		
25	1"	12.0	14.0

- Connections Types and Sizes:

Port Size		SW, BW SS ANSI	BW DIN
mm	inch		
25	1"	3/4", 1", 1 1/4"	20, 25, 32

- Pressure Regulator Range:
Range A: 0.35 - 8.3 barg (5 - 120 psig)
- Maximum Operating Pressure Difference (MOPD):
20.7 barg (300 psid)
- Weight:

Valve Type	kg	lbs
PA4C	5.1	11.2
PA4CS	6.0	13.2
PA4CB	6.0	13.2
PA4CBS	6.4	14.0
PA4CD	7.2	15.8
PA4CZ	5.6	12.3

- Coil Voltages:
100-110V AC/60 Hz, 100V AC/50 Hz
120V AC/60 Hz, 110V AC/50 Hz
200-220V AC/60 Hz, 200V AC/50 Hz
208-240V AC/60 Hz
240V AC/60 Hz, 220V AC/50 Hz
24V DC

⁽¹⁾ The 25 mm (1") port is available with a standard, 75% reduced, 50% reduced and 25% reduced plug.



PA4C: Inlet Pressure Regulator



PA4CZ: Inlet Pressure Regulator



PA4CB: Inlet Pressure Regulator with Electric Bypass



PA4CS: Inlet Pressure Regulator with Electric Shut-Off



PA4CD: Dual Inlet Pressure Regulator

Solenoid Valve

Data Sheet

Type: PS4C



Purpose:

The PS4C weld-in line series solenoid valves are designed to overcome corrosion problems encountered in harsh environments. Being weld-in, the valves reduce the potential for connection leaks and can be entirely serviced from the top.

This improved design has a higher working pressure, greater working temperature range and higher flow capacities than competitive products.

These valves provide long-term performance and with replaceable internal components. Specially designed wear rings eliminate the need for removal of the body from the line (maintenance-free).



Contact Information:

Parker Hannifin Corporation
Refrigerating Specialties Division
2445 South 25th. Avenue
Broadview, IL 60155-3891

phone (708) 681-6300
fax (708) 681-6306

www.parker.com/refspec

Product Features:

- Stainless steel construction increases product life cycle
- Cartridge based design simplifies service and eliminates body wear
- Increased flow capacity enables smaller valve sizing
- Overall weight reduction up to 50% compared to traditional flanged products
- Integral features prevent contaminants from reaching the pilot section of the valve
- Suitable for ammonia, CO₂ and halocarbon refrigerants
- Multiple refrigerant capacities available
- Interchangeable with other P-Series offerings
- Coil options to meet various applications



ENGINEERING YOUR SUCCESS.

Technical Data

- Liquid Temperature Range:
-60°C to 120°C (-76°F to 248°F)
- Ambient Temperature Range:
-60°C to 71°C (-71°F to 160°F)
- Max Rated Pressure (MRP):
52 barg (754 psig)
- Minimum Pressure Drop:
0.14 barg (2 psig)
- Port sizes:

mm	inch
25 ⁽¹⁾	1"

- Flow Coefficients:

Port Size		K _v	C _v
mm	inch		
25	1"	12.0	14.0

- Connections Types and Sizes:

Port Size		SW, BW SS ANSI	BW DIN
mm	inch		
25	1"	¾", 1", 1¼"	20, 25, 32


- Maximum Operating Pressure Difference (MOPD):
20.7 barg (300 psid)

- Weight:

Valve Type	kg	lbs
PS4C	5.1	11.2

- Coil Voltages:

100-110V AC/60 Hz, 100V AC/50 Hz
120V AC/60 Hz, 110V AC/50 Hz
200-220V AC/60 Hz, 200V AC/50 Hz
208-240V AC/60 Hz
240V AC/60 Hz, 220V AC/50 Hz
24V DC

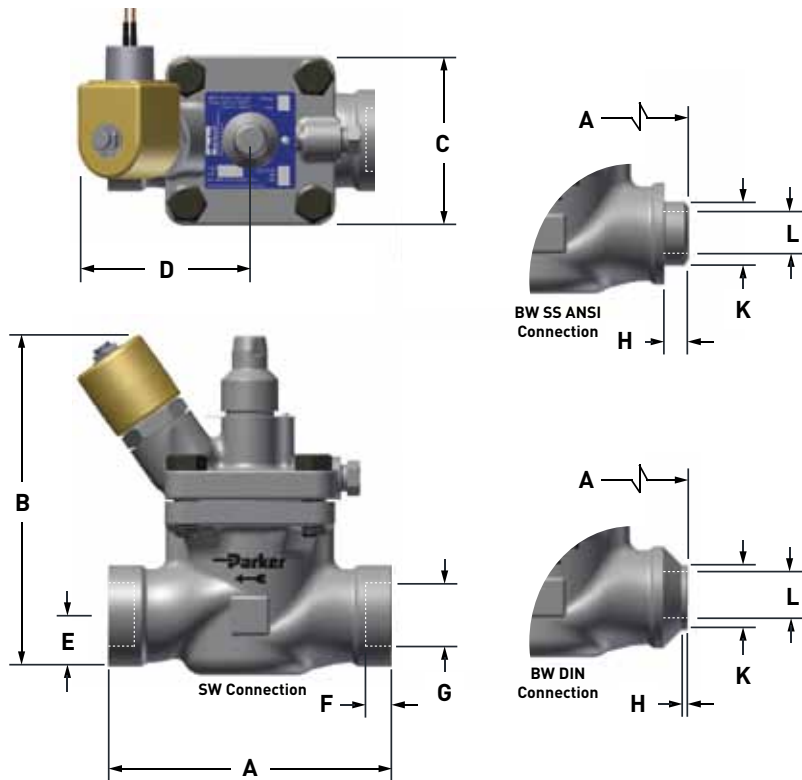

Dimensional Diagram: PS4C Solenoid Valve

Port Size		A		B		C		D		E	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
25	1"	149	5.9	180	7.1	89	3.5	89	3.5	28	1.1

Port Size		SW Connections						
		Dimensions	¾"		1"		1¼"	
mm	inch				mm	inch	mm	inch
25	1"	G	28	1.08	34	1.35	43	1.69
		F	13	0.50	13	0.50	13	0.50

Port Size		BW Stainless Steel (SS) ANSI Connections						
		Dimensions	¾"		1"		1¼"	
mm	inch		mm	inch	mm	inch	mm	inch
25	1"	H	14	0.55	14	0.55	14	0.55
		K	27	1.06	34	1.33	42	1.67
		L	21	0.82	27	1.05	35	1.38

Port Size		BW DIN Connections						
		Dimensions	20mm		25mm		32mm	
mm	inch		mm	inch	mm	inch	mm	inch
25	1"	H	2.8	0.11	2.8	0.11	28	0.11
		K	28	1.10	34	1.34	43	1.70
		L	26	1.02	32	1.28	41	1.61

⁽¹⁾ The 25 mm (1") port is available with a standard, 75% reduced, 50% reduced and 25% reduced plug.

